

TECHNICAL DATA INCLUDED IN THIS BROCHURE MAY BE CHANGE FROM TIME TO TIME DUE TO THE PRODUCT IMPROVEMENTS UNDERTAKES BY THE MANUFACTURER. THE COMPANY RESERVES THE UNCONDITIONAL RIGHTS TO IMPLEMENT SUCH CHANGES WITHOUT REFERENCE TO THIRD PARTIES.



The advertisement for Hanthing Water pumps features a blue and white color scheme. On the left is the Hanthing logo, a stylized blue 'S' shape above the word 'Hanthing' in blue. To the right of the logo is a collage of images showing various pump models and components. A large, diagonal yellow banner with the text 'Water pump' in black is positioned across the center. To the right of the banner, four blue rectangular boxes list the pump types: 'Inline', 'Split case', 'Multi stage', and 'End suction'. At the bottom, the website 'www.hanthing.com' is displayed in white text on a blue background.

Hanthing

Water pump

Inline
Split case
Multi stage
End suction

www.hanthing.com



The advertisement for Exthin Air Compressors features a black and yellow color scheme. On the left is the Exthin logo, a stylized yellow 'X' shape above the word 'Exthin' in yellow. To the right of the logo is a collage of images showing various compressor models and components. A large, diagonal yellow banner with the text 'Air Compressor' in black is positioned across the center. To the right of the banner, three black rectangular boxes list the compressor types: 'Portable', 'Screw', and 'Piston'. On the far right is a detailed image of a large industrial air compressor unit. At the bottom, the website 'www.exthin.com' is displayed in white text on a black background.

Exthin

Air Compressor

Portable
Screw
Piston

www.exthin.com

ShangHai HanThing pump Co.,ltd
Website: www.hanthing.com
Address: NO.566, Tongli road, songjiang district, Shanghai, China
Mobile: +86-021-56550238
Email: sales@hanthing.com



国家产品质量免检 | 中国著名品牌

TJ系列 切割 / 泵

QG Series Cutting Sewage Pump








WQ

无堵塞排污泵

WQ NON-CLOG SEWAGE PUMP

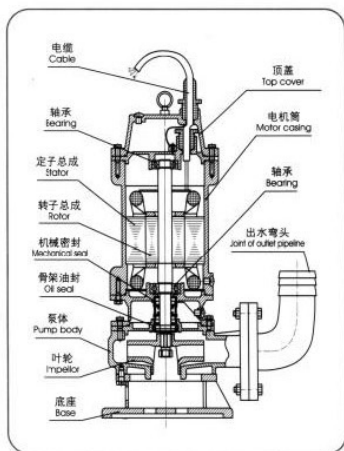

用途:

- 1、污水处理厂。
- 2、地铁、地下室、人防系统排水站。
- 3、工厂、医院、住宅区的污水排放。

使用条件:

- 1、介质温度不超过50℃，密度为1.0~1.3kg/m³。
- 2、电机部分露出液面不超过1/2。
- 3、泵必须在使用扬程范围内使用，保证电机不过载。

特点:

100%铜线电机，足功率
合金对碳化硅机械密封
不锈钢主轴
不锈钢紧固件
外观光滑美观



Application:

1. Sewage treatment plant.
2. Subway, basement, air defense systems pumping station.
3. Factories, hospitals, residential sewage discharges.

Conditions of Use:

1. Medium temperature does not exceed 50 °C, density of 1.0-1.3kg/m³
2. No more of 1/2 part of motor should be exposed.
3. The pump must be used within the scope of head, ensure that the motor is not overloaded

Feature:

Motor: 100% copper wire, full power
mechanical seal: Al oy and silicon carbide
Shaft: stainless steel
Screw: stainless steel
Outlook: smooth and nice

性能参数表 Table of parement

编号	Model 型号	Capacity 流量	Head 扬程	Power 功率	DIA 口径	Voltage 电压	Speed 转速	Weight 重量
	WQ/QW	(m³/h)	(m)	(kW)	(mm)	(V)	(r/min)	(kg)
1	25-5-16-0.55	5	16	0.55	25	380/220	2900	24
2	32-6-15-0.55	6	15	0.55	32	380/220	2900	25
3	40-6-13-0.55	6	13	0.55	40	380/220	2900	27
4	50-7-15-0.55	7	15	0.55	50	380/220	2900	29
5	65-15-6-0.55	15	6	0.55	65	380/220	2900	31
6	80-30-5-0.55	30	5	0.55	80	380/220	2900	35
7	25-5-18-0.75	5	18	0.75	25	380/220	2900	25
8	32-6-16-0.75	6	16	0.75	32	380/220	2900	26
9	40-7-15-0.75	7	15	0.75	40	380/220	2900	27
10	50-10-10-0.75	10	10	0.75	50	380/220	2900	29
11	50-20-7-0.75	20	7	0.75	50	380/220	2900	29
12	65-15-7-0.75	15	7	0.75	65	380/220	2900	32
13	80-35-5-0.75	35	5	0.75	80	380/220	2900	36
14	25-8-18-1.1	8	18	1.1	25	380/220	2900	27
15	32-12-15-1.1	12	15	1.1	32	380/220	2900	28
16	40-7-18-1.1	7	18	1.1	40	380/220	2900	30
17	50-9-15-1.1	9	15	1.1	50	380/220	2900	32
18	65-15-9-1.1	15	9	1.1	65	380/220	2900	35
19	80-40-6-1.1	40	6	1.1	80	380/220	2900	37
20	25-7-22-1.5	7	22	1.5	25	380/220	2900	31
21	32-8-20-1.5	8	20	1.5	32	380/220	2900	32
22	40-10-18-1.5	10	18	1.5	40	380/220	2900	33
23	50-15-12-1.5	15	12	1.5	50	380/220	2900	35
24	50-15-15-1.5	15	15	1.5	50	380/220	2900	35
25	65-25-7-1.5	25	7	1.5	65	380/220	2900	37
26	80-40-8-1.5	40	8	1.5	80	380/220	2900	39
27	100-50-6-1.5	50	6	1.5	100	380/220	2900	45
28	40-8-25-2.2	8	25	2.2	40	380	2900	38
29	50-9-22-2.2	9	22	2.2	50	380	2900	40
30	50-15-20-2.2	15	20	2.2	50	380	2900	40
31	50-25-15-2.2	25	15	2.2	50	380	2900	40
32	65-20-15-2.2	20	15	2.2	65	380	2900	47
33	80-40-10-2.2	40	10	2.2	80	380	2900	46
34	100-50-7-2.2	50	7	2.2	100	380	2900	53
35	40-10-35-3	10	35	3	40	380	2900	45
36	50-15-30-3	15	30	3	50	380	2900	47
37	65-37-13-3	37	13	3	65	380	2900	49
38	80-45-12-3	45	12	3	80	380	2900	50
39	100-60-9-3	60	9	3	100	380	2900	60
40	50-15-35-4	15	35	4	50	380	2900	72
41	65-20-25-4	20	25	4	65	380	2900	76
42	80-40-15-4	40	15	4	80	380	2900	75
43	100-60-12-4	60	12	4	100	380	2900	78
44	100-80-10-4	80	10	4	100	380	1450	82
45	125-80-10-4	80	10	4	125	380	2900	85
46	150-100-8-4	100	8	4	150	380	2900	120
47	150-100-8-4	100	8	4	150	380	1450	120

性能参数表 Table of parement

编号	Model 型号 WQ/QW	Capacity 流量 (m³/h)	Head 扬程 (m)	Power 功率 (kW)	DIA 口径 (mm)	Voltage 电压 (V)	Speed 转速 (r/min)	Weight 重量 (kg)
48	50-20-40-5.5	20	40	5.5	50	380	2900	89
49	65-25-35-5.5	25	35	5.5	65	380	2900	92
50	80-30-30-5.5	30	30	5.5	80	380	2900	93
51	100-65-18-5.5	65	18	5.5	100	380	2900	95
52	100-110-10-5.5	110	10	5.5	100	380	1450	135
53	125-80-12-5.5	80	12	5.5	125	380	2900	105
54	150-100-10-5.5	100	10	5.5	150	380	2900	105
55	150-140-7-5.5	140	7	5.5	150	380	1450	140
56	50-20-50-7.5	20	50	7.5	50	380	2900	102
57	65-30-40-7.5	30	40	7.5	65	380	2900	105
58	65-40-30-7.5	40	30	7.5	65	380	2900	105
59	80-65-25-7.5	65	25	7.5	80	380	2900	108
60	100-80-15-7.5	80	15	7.5	100	380	2900	110
61	100-80-22-7.5	80	22	7.5	100	380	2900	110
62	100-100-15-7.5	100	15	7.5	100	380	1450	145
63	125-90-15-7.5	90	15	7.5	125	380	2900	125
64	150-100-15-7.5	100	15	7.5	150	380	2900	125
65	150-145-9-7.5	145	9	7.5	150	380	1450	150
66	200-150-9-7.5	150	9	7.5	200	380	2900	135
67	200-210-7-7.5	210	7	7.5	200	380	1450	140
68	50-20-60-11	20	60	11	50	380	2900	145
69	65-30-50-11	30	50	11	65	380	2900	150
70	80-40-40-11	40	40	11	80	380	2900	153
71	100-80-25-11	80	25	11	100	380	2900	159
72	100-100-25-11	100	25	11	100	380	1450	213
73	125-130-15-11	130	15	11	125	380	2900	168
74	125-130-15-11	130	15	11	125	380	1450	224
75	150-150-12-11	150	12	11	150	380	2900	168
76	150-100-20-11	100	20	11	150	380	2900	168
77	150-130-15-11	130	15	11	150	380	1450	224
78	200-200-9-11	200	9	11	200	380	2900	180
79	200-300-7-11	300	7	11	200	380	1450	253
80	50-30-60-15	30	60	15	50	380	2900	150
81	65-35-55-15	35	55	15	65	380	2900	155
82	80-45-52-15	45	52	15	80	380	2900	163
83	100-60-45-15	60	45	15	100	380	2900	169
84	100-100-30-15	100	30	15	100	380	1450	213
85	125-130-20-15	130	20	15	125	380	2900	178
86	125-130-20-15	130	20	15	125	380	1450	224
87	150-100-30-15	100	30	15	150	380	1450	178
88	150-150-20-15	150	20	15	150	380	2900	224
89	200-220-12-15	220	12	15	200	380	1450	253
90	200-250-11-15	250	11	15	200	380	2900	198
91	100-100-35-18.5	100	35	18.5	100	380	1450	272


性能参数表 Table of parement

编号	Model 型号 WQ/QW	Capacity 流量 (m³/h)	Head 扬程 (m)	Power 功率 (kW)	DIA 口径 (mm)	Voltage 电压 (V)	Speed 转速 (r/min)	Weight 重量 (kg)
91	150-180-20-18.5	180	20	18.5	150	380	1450	280
92	200-250-15-18.5	250	15	18.5	200	380	1450	310
93	250-400-7-18.5	400	7	18.5	250	380	1450	340
94	100-100-40-22	100	40	22	100	380	1450	278
95	150-200-22-22	200	22	22	150	380	1450	318
96	150-180-25-22	180	25	22	150	380	1450	318
97	200-300-15-22	300	15	22	200	380	1450	343
98	250-450-7-22	450	7	22	250	380	1450	373
99	250-400-10-22	400	10	22	250	380	1450	373
100	150-180-30-30	180	30	30	150	380	1450	510
101	150-250-22-30	250	22	30	150	380	1450	510
102	200-400-13-30	400	13	30	200	380	1450	530
103	250-600-9-30	600	9	30	250	380	1450	580
104	300-800-7-30	800	7	30	300	380	1450	630
105	350-900-6-30	900	6	30	350	380	1450	660
106	150-200-30-37	200	30	37	150	380	1450	520
107	200-350-25-37	350	25	37	200	380	1450	560
108	250-600-12-37	600	12	37	250	380	1450	610
109	300-800-10-37	800	10	37	300	380	1450	660
110	350-900-8-37	900	8	37	350	380	1450	710
111	150-180-45-45	180	45	45	150	380	1450	530
112	200-400-25-45	400	25	45	200	380	1450	580
113	250-600-15-45	600	15	45	250	380	1450	620
114	300-800-12-45	800	12	45	300	380	1450	660
115	350-900-10-45	900	10	45	350	380	1450	700
116	150-200-50-55	200	50	55	150	380	1450	850
117	200-400-30-55	400	30	55	200	380	1450	870
118	250-600-20-55	600	20	55	250	380	1450	900
119	300-800-15-55	800	15	55	300	380	980	920
120	350-1100-10-55	1100	10	55	350	380	980	940
121	150-200-60-75	200	60	75	150	380	580	1000
122	200-300-48-75	300	48	75	200	380	1450	1040
123	250-600-25-75	600	25	75	250	380	1450	1060
124	300-800-20-75	800	20	75	300	380	1450	1100
125	350-1300-12-75	1300	12	75	350	380	1450	1150
126	150-200-75-90	200	75	90	150	380	1450	1260
127	200-300-55-90	300	55	90	200	380	1450	1300
128	250-800-25-90	800	25	90	250	380	1450	1360
129	300-950-20-90	950	20	90	300	380	1450	1400
130	350-1500-15-90	1500	15	90	350	380	1450	1450


自动耦合式安装

泵沿导杆放下，自动连接至排出管道系统。安装建筑费用极少，维修费用降低。

耦合装置安装原理图

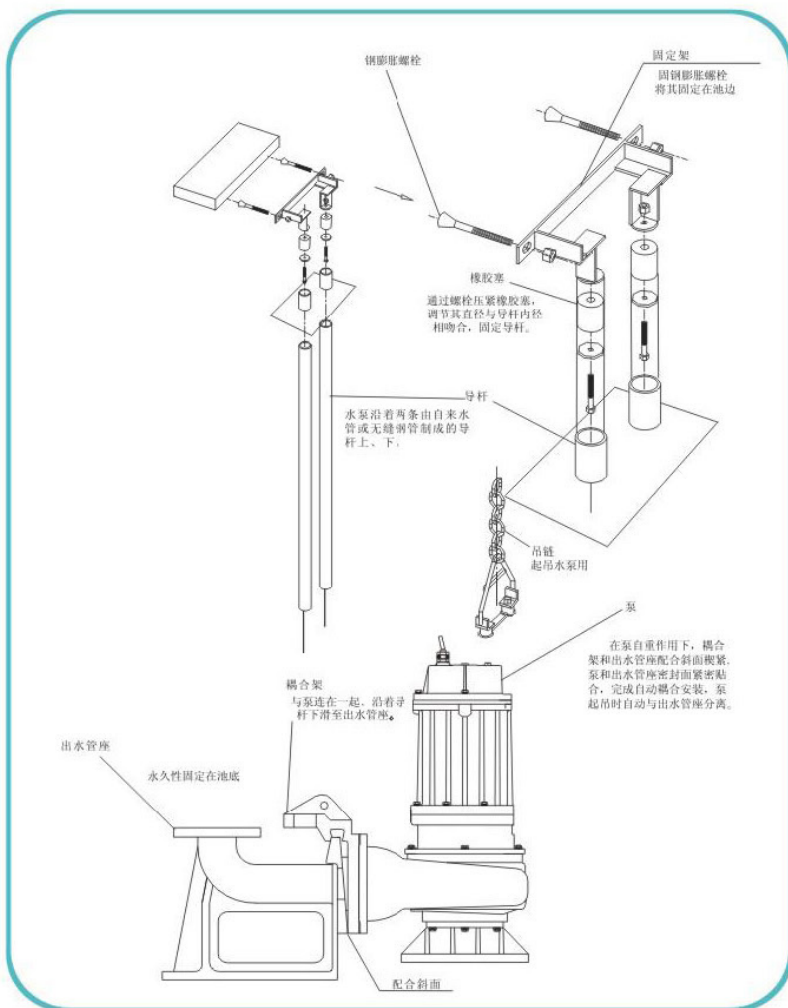

WQ、QW型潜水排污泵

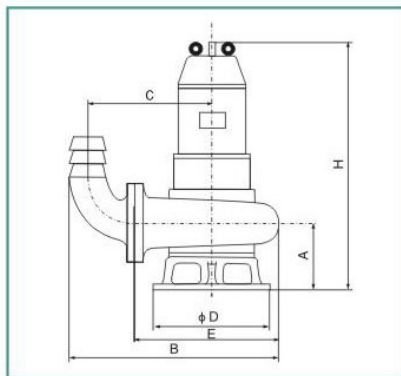

外形尺寸表 Dimension Table

编号	型号 WQ/QW	A	B	C	D	E	H
1	25-5-16-0.55	125	290	170	205	220	510
2	32-6-15-0.55	128	310	180	205	225	515
3	40-6-13-0.55	130	320	190	205	230	520
4	50-7-10-0.55	133	335	200	205	240	530
5	65-15-6-0.55	135	360	225	205	245	535
6	80-30-5-0.55	135	375	240	205	260	535
7	25-5-18-0.75	125	290	170	205	220	510
8	32-6-16-0.75	128	310	180	205	225	515
9	40-7-15-0.75	130	320	190	205	230	520
10	50-10-10-0.75	133	335	200	205	240	530
11	50-20-7-0.75	133	335	200	205	240	530
12	65-15-7-0.75	135	360	225	205	245	535
13	80-35-5-0.75	135	375	240	205	260	535
14	25-8-18-1.1	125	290	170	205	220	540
15	32-12-15-1.1	128	310	180	205	225	545
16	40-7-18-1.1	130	320	190	205	230	550
17	50-9-15-1.1	133	335	200	205	240	550
18	65-15-9-1.1	135	360	225	205	245	560
19	80-40-6-1.1	135	375	240	205	260	560
20	25-7-22-1.5	125	310	175	230	225	535
21	32-8-20-1.5	130	330	195	230	240	540
22	40-10-18-1.5	130	345	200	230	255	550
23	50-15-12-1.5	140	360	220	230	260	560
24	65-25-7-1.5	145	380	235	230	265	560
25	80-40-8-1.5	145	400	250	230	270	560
26	100-50-6-1.5	155	435	265	230	285	570
27	40-8-25-2.2	130	345	200	230	255	580
28	50-9-22-2.2	140	360	220	230	260	590

外形尺寸表 Dimension Table

编号	型号 WQ/QW	A	B	C	D	E	H
29	50-15-20-2.2	140	360	220	230	260	590
30	65-20-15-2.2	145	380	235	230	265	590
31	80-40-10-2.2	145	400	250	230	270	610
32	100-50-7-2.2	155	435	265	230	285	620
33	40-10-35-3	135	335	210	230	270	610
34	50-15-30-3	135	370	225	230	280	605
35	65-37-13-3	135	395	240	230	280	610
36	80-45-12-3	140	410	260	230	290	610
37	100-60-9-3	145	445	280	230	300	630
38	50-15-35-4	160	425	250	290	330	670
39	65-20-25-4	165	450	275	290	330	690
40	80-30-22-4	170	465	280	290	335	695
41	80-40-15-4	170	465	280	290	335	695
42	100-60-12-4	180	490	300	290	335	705
43	150-100-8-4	180	550	340	290	355	715
44	150-100-8-4	180	550	340	290	355	715
45	50-20-40-5.5	160	440	250	320	330	730
46	65-25-35-5.5	175	465	275	320	330	750
47	80-30-30-5.5	175	475	280	320	335	750
48	100-65-18-5.5	185	510	300	320	335	790
49	150-100-10-5.5	200	580	350	320	355	820
50	50-20-50-7.5	190	500	290	360	365	820
51	65-30-40-7.5	200	520	310	310	375	820
52	65-40-30-7.5	200	520	310	310	375	820
53	80-65-25-7.5	200	540	320	310	390	830
54	100-80-15-7.5	200	570	340	310	390	830
55	100-100-15-7.5	210	610	400	340		890
56	150-100-15-7.5	210	630	360	310	400	830
57	150-145-9-7.5	220	680	430	340		900
58	200-210-7-7.5	225	720	450	310	415	845
59	50-20-60-11	270	483	280	310	400	850
60	65-30-50-11	290	515	307	310	415	870
61	80-40-40-11	290	525	317	310	415	870
62	100-80-25-11	295	575	365	310	420	875
63	100-100-25-11/4P	200	650	400	410	500	960
64	150-150-12-11	330	640	425	310	430	910
65	150-130-15-11/4P	220	730	465	410	530	1000
66	200-200-9-11	335	740	515	310	450	915
67	200-300-7-11/4P	220	830	555	410	530	1000
68	50-30-60-15	270	483	280	310	400	910
69	65-35-55-15	290	515	307	310	415	930
70	80-45-52-15	290	525	317	310	415	930
71	100-60-45-15	295	575	365	310	420	935
72	100-100-30-15/4P	200	650	400	410	500	1000
73	150-180-15-15/4P	220	730	465	410	530	1040
74	150-150-20-15	330	640	425	310	430	970
75	200-220-12-15	220	830	555	410	530	1040


外形尺寸表 Dimension Table

编号	型号 WQ/QW	A	B	C	D	E	H
76	200-250-11-15	335	740	515	310	450	970
77	100-100-35-18.5	200	650	400	410	500	1030
78	150-180-20-18.5	220	730	465	410	530	1070
79	200-250-11-18.5	220	830	550	410	530	1070
80	200-300-10-18.5	220	830	550	410	530	1070
81	250-400-7-18.5	230	900	600	410	540	1080
82	100-100-40-22	200	650	400	410	500	1030
83	150-250-22-22	220	730	465	410	530	1070
84	150-180-30-22	220	730	465	410	530	1070
85	200-300-15-22	220	830	550	410	530	1070
86	200-400-10-22	220	830	550	410	530	1070
87	250-450-7-22	230	900	600	410	540	1080
88	150-180-30-30	270	830	520	470	630	1270
89	150-250-22-30	270	830	520	470	630	1270
90	200-400-13-30	270	980	635	470	690	1270
91	200-360-15-30	270	980	635	470	690	1270
92	200-250-22-30	270	980	635	470	690	1270
93	250-600-9-30	280	990	720	470	700	1320
94	300-800-7-30	280	/	350	470	700	1320
95	350-900-6-30	280	/	355	470	710	1320
96	150-200-30-37	270	830	520	470	630	1320
97	200-350-25-37	270	980	635	470	690	1320
98	250-600-12-37	280	990	720	470	700	1370
99	300-800-10-37	280	/	350	470	700	1370
100	350-900-8-37	280	/	355	470	710	1370
101	150-180-45-45	270	830	520	470	630	1320
102	200-400-25-45	270	980	635	470	690	1320
103	250-600-15-45	280	990	720	470	700	1370
104	300-800-12-45	280	/	350	470	700	1370
105	350-900-10-45	280	/	355	470	710	1370
106	150WQ200-50-55	330	1020	/	520	700	1500
107	200WQ400-30-55	330	1150	/	520	750	1500
108	250WQ600-20-55	395	1280	/	520	780	1610
109	300WQ800-15-55	400	1330	/	520	780	1615
110	350WQ1100-10-55	400	/	/	520	780	1615
111	150WQ200-60-75	330	1020	/	520	700	1580
112	200WQ300-48-75	330	1150	/	520	750	1580
113	250WQ600-25-75	395	1280	/	520	780	1690
114	300WQ800-20-75	400	1330	/	520	780	1695
115	350WQ1300-12-75	400	/	/	520	780	1695
116	150WQ200-75-90	330	1020	/	520	700	1580
117	200WQ300-55-90	330	1150	/	520	750	1580
118	250WQ800-25-90	395	1280	/	520	780	1690
119	300WQ1000-25-90	400	1330	/	520	780	1695
120	350WQ1500-15-90	400	/	/	520	780	1695

JYWQ

自动搅匀排污泵

JYWQ AUTOMATIC STIRRING SEWAGE PUMP

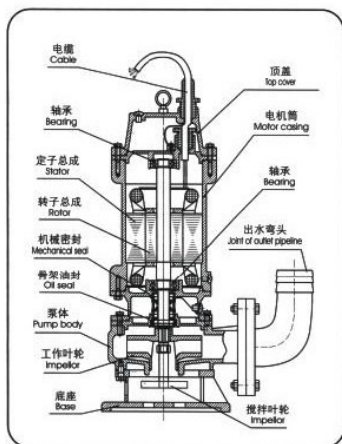

用途:

- 1、污水处理厂。
- 2、地铁、地下室、人防系统排水站。
- 3、工厂、医院、住宅区的污水排放。

使用条件:

- 1、介质温度不超过50℃，密度为1.0~1.3kg/m³。
- 2、电机部分露出液面不超过1/2。
- 3、泵必须在使用扬程范围内使用，保证电机不过载

特点:

100%铜线电机，足功率

合金对碳化硅机械密封

除了主叶轮，还有一个搅匀叶轮

不锈钢主轴

不锈钢紧固件

外观光滑美观

Application:

1. Sewage treatment plant.
2. Subway, basement, air defense systems pumping station.
3. Factories, hospitals, residential sewage discharges.

Conditions of Use:

1. Medium temperature does not exceed 50 °C, density of 1.0~1.3kg / m³
2. No more of 1/2 part of motor should be exposed.
3. The pump must be used within the scope of head, ensure that the motor is not overloaded

Feature:

Motor: 100% copper wire, full power

mechanical seal: Alloy and silicon carbide

Shaft: stainless steel

Screw: stainless steel

Outlook: smooth and nice

Except the impeller, the pump has a stirring impeller


性能参数表 Table of parement

编号	Model 型号	Capacity 流量 (m³/h)	Head 扬程 (m)	Power 功率 (kW)	DIA 口径 (mm)	Voltage 电压 (V)	Stir well diameter 搅匀直径 (mm)	Speed 转速 (r/min)	Weight 重量 (kg)
1	50JYWQ10-10-1200-0.75	10	10	0.75	50	380	1200	2900	30
2	50JYWQ10-12-1200-1.1	10	12	1.1	50	380	1200	2900	33
3	50JYWQ20-7-1200-1.1	20	7	1.1	50	380	1200	2900	33
4	40JYWQ12-15-1200-1.5	12	15	1.5	40	380	1200	2900	34
5	50JYWQ15-10-1200-1.5	15	10	1.5	50	380	1200	2900	36
6	50JYWQ15-15-1200-1.5	15	15	1.5	50	380	1200	2900	36
7	50JYWQ12-15-1200-2.2	12	15	1.5	50	380	1200	2900	41
8	50JYWQ15-20-1200-2.2	15	20	2.2	50	380	1200	2900	41
9	50JYWQ20-15-1200-2.2	20	15	2.2	50	380	1200	2900	41
10	50JYWQ25-10-1200-2.2	25	10	2.2	50	380	1200	2900	41
11	65JYWQ25-10-1200-2.2	25	10	2.2	65	380	1200	2900	48
12	80JYWQ30-8-1200-2.2	30	8	2.2	80	380	1200	2900	47
13	80JYWQ40-7-1200-2.2	40	7	2.2	80	380	1200	2900	47
14	50JYWQ25-15-1400-3	25	15	3	50	380	1400	2900	48
15	50JYWQ40-9-1200-3	40	9	3	50	380	1200	2900	48
16	65JYWQ25-15-1400-3	25	15	3	65	380	1400	2900	50
17	65JYWQ37-13-1400-3	37	13	3	65	380	1400	2900	50
18	80JYWQ40-10-1200-3	40	10	3	80	380	1200	1450	51
19	80JYWQ50-10-1600-3	50	10	3	80	380	1600	2900	51
20	100JYWQ60-9-1600-3	60	9	3	100	380	1600	2900	61
21	50JYWQ15-25-1200-4	15	25	4	50	380	1200	2900	77
22	50JYWQ15-30-1200-4	15	30	4	50	380	1200	2900	77
23	50JYWQ25-22-1200-4	25	22	4	50	380	1200	2900	77
24	50JYWQ40-15-1400-4	40	15	4	50	380	1400	2900	77
25	65JYWQ25-28-1400-4	25	28	4	65	380	1400	2900	73
26	80JYWQ40-15-1600-4	40	15	4	80	380	1600	2900	76
27	80JYWQ43-13-1600-4	43	13	4	80	380	1600	2900	76
28	80JYWQ60-13-1600-4	60	13	4	80	380	1600	2900	76
29	100JYWQ60-12-1600-4	60	12	4	100	380	1600	2900	79
30	100JYWQ80-9-1600-4	80	9	4	100	380	1600	1450	79
31	50JYWQ25-32-1600-5.5	25	32	5.5	50	380	1400	2900	98
32	65JYWQ30-30-1600-5.5	30	30	5.5	65	380	1600	2900	93
33	80JYWQ35-25-1600-5.5	35	25	5.5	80	380	1600	2900	94
34	80JYWQ50-20-1600-5.5	50	20	5.5	80	380	1600	2900	94
35	100JYWQ65-15-1600-5.5	65	15	5.5	100	380	1600	2900	96
36	100JYWQ70-15-2000-5.5	70	15	5.5	100	380	2000	1450	96
37	150JYWQ85-10-2000-5.5	85	10	5.5	150	380	200	2900	106
38	50JYWQ30-30-1600-7.5	30	30	7.5	50	380	1600	2900	103
39	65JYWQ40-30-1600-7.5	40	30	7.5	65	380	1600	2900	106
40	80JYWQ50-25-1600-7.5	50	25	7.5	80	380	1600	2900	109
41	80JYWQ65-25-1600-7.5	65	25	7.5	80	380	1600	2900	109
42	100JYWQ70-18-2000-7.5	70	18	7.5	100	380	2000	2900	137
43	100JYWQ100-15-2000-7.5	100	15	7.5	100	380	2000	1450	137
44	150JYWQ150-10-2000-7.5	150	10	7.5	150	380	2000	1450	126
45	150JYWQ100-12-2000-7.5	100	12	7.5	150	380	2000	2900	126
46	150JYWQ200-7-2500-7.5	200	7	7.5	150	380	2500	1450	126
47	150JYWQ250-6-2500-7.5	250	6	7.5	150	380	2500	1450	126
48	50JYWQ25-50-2000-11	25	50	11	50	380	2000	2900	146
49	65JYWQ35-45-2000-11	35	45	11	65	380	2000	2900	151
50	80JYWQ40-40-2000-11	40	40	11	80	380	2000	2900	154

BWQ/JPWQ

轻便型排污泵

BWQ/JPWQ SUBMERSIBLE SEWAGE PUMP

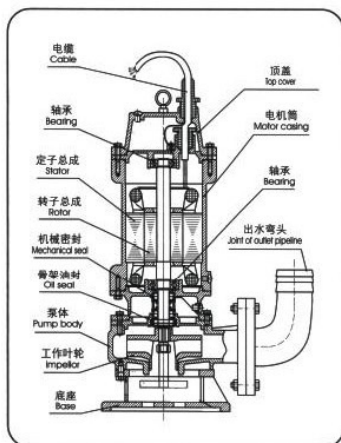

用途:

1. 污水处理厂。
2. 地铁、地下室、人防系统排水站。
3. 工厂、医院、住宅区的污水排放。

使用条件:

1. 介质温度不超过 50°C ，密度为 $1.0\sim 1.3\text{kg}/\text{m}^3$ 。
2. 电机部分露出液面不超过 $1/2$ 。
3. 泵必须在使用扬程范围内使用，保证电机不过载。

特点:

100%铜线电机，足功率
合金对碳化硅机械密封
不锈钢机筒
不锈钢主轴
不锈钢紧固件
外观光滑美观
重量轻，方便搬运



Application:

1. Sewage treatment plant.
2. Subway, basement, air defense systems pumping station.
3. Factories, hospitals, residential sewage discharges.

Conditions of Use:

1. Medium temperature does not exceed 50°C , density of $1.0\sim 1.3\text{kg}/\text{m}^3$
2. No more of $1/2$ part of motor should be exposed.
3. The pump must be used within the scope of head, ensure that the motor is not overloaded

Feature:

Motor: 100% copper wire, full power
Mechanical seal: alloy and silicon carbide
Motor case: stainless steel
Shaft: stainless steel
Screw: stainless steel
Outlook: smooth and nice

性能参数表 Table of parement

编号	Model 型号	Capacity 流量 (m³/h)	Head 扬程 (m)	Power 功率 (kW)	DIA 口径 (mm)	Voltage 电压 (V)	Speed 转速 (r/min)
	BWQ/JPWQ						
1	50-10-10-0.75	10	10	0.75	50	380/220	2900
2	50-20-7-0.75	20	7	0.75	50	380/220	2900
3	65-15-7-0.75	15	7	0.75	65	380/220	2900
4	40-7-18-1.1	7	18	1.1	40	380/220	2900
5	50-9-15-1.1	9	15	1.1	50	380/220	2900
6	65-15-9-1.1	15	9	1.1	65	380/220	2900
7	80-40-6-1.1	40	6	1.1	80	380/220	2900
8	40-10-18-1.5	10	18	1.5	40	380	2900
9	50-15-12-1.5	15	12	1.5	50	380	2900
10	65-25-7-1.5	25	7	1.5	65	380	2900
11	80-40-8-1.5	40	8	1.5	80	380	2900
12	50-9-22-2.2	9	22	2.2	50	380	2900
13	50-15-20-2.2	15	20	2.2	50	380	2900
14	65-20-15-2.2	20	15	2.2	65	380	2900
15	80 40 10 2.2	40	10	2.2	80	380	2900
16	100-50-7-2.2	50	7	2.2	100	380	2900
17	50-15-30-3	15	30	3	50	380	2900
18	65-37-13-3	37	13	3	65	380	2900
19	80-45-12-3	45	12	3	80	380	2900
20	100-60-9-3	60	9	3	100	380	2900
21	50-15-35-4	15	35	4	50	380	2900
22	65-20-25-4	20	25	4	65	380	2900
23	80-40-15-4	40	15	4	80	380	2900
24	100-60-12-4	60	12	4	100	380	2900
25	150-100-8-4	100	8	4	150	380	2900
26	50-20-40-5.5	20	40	5.5	50	380	2900
27	65-25-35-5.5	25	35	5.5	65	380	2900
28	80-30-30-5.5	30	30	5.5	80	380	2900
29	100-65-18-5.5	65	18	5.5	100	380	2900
30	150-100-10-5.5	100	10	5.5	150	380	2900
31	50-20-50-7.5	20	50	7.5	50	380	2900
32	65-30-40-7.5	30	40	7.5	65	380	2900
33	65-40-30-7.5	40	30	7.5	65	380	2900
34	80-65-25-7.5	65	25	7.5	80	380	2900
35	100-80-15-7.5	80	15	7.5	100	380	2900
36	150-100-15-7.5	100	15	7.5	150	380	2900
37	200-150-9-7.5	150	9	7.5	200	380	2900
38	50-20-60-11	20	60	11	50	380	2900
39	65-30-50-11	30	50	11	65	380	2900
40	80-40-40-11	40	40	11	80	380	2900
41	100-80-25-11	80	25	11	100	380	2900
42	125-130-15-11	130	15	11	125	380	2900
43	150-150-12-11	150	12	11	150	380	2900
44	150-100-20-11	100	20	11	150	380	2900
45	200-200-9-11	200	9	11	200	380	2900

汉森 Hanthing pump

性能参数表 Model Table

Model 型号	Capacity 流量	Head 扬程	Power 功率	DIS 口径	Voltage 电压	Speed 转速	Weight 重量		Model 型号	Capacity 流量	Head 扬程	Power 功率	DIS 口径	Voltage 电压	Speed 转速	Weight 重量
WQR	(m ³ /h)	(m)	(kW)	(mm)	(V)	(r/min)	(kg)		WQR	(m ³ /h)	(m)	(kW)	(mm)	(V)	(r/min)	(kg)
25-5-18-0.75	5	18	0.75	25	380	2900	25	*	65-40-30-7.5	40	30	7.5	65	380	2900	105
32-6-16-0.75	6	16	0.75	32	380	2900	26	*	80-65-25-7.5	65	16	7.5	80	380	2900	108
40-7-15-0.75	7	15	0.75	40	380	2900	27	*	100-80-15-7.5	80	15	7.5	100	380	2900	136
* 50-10-10-0.75	10	10	0.75	50	380	2900	29		100-100-15-7.5	100	15	7.5	100	380	1450	145
65-15-7-0.75	15	7	0.75	65	380	2900	32	*	150-100-15-7.5	150	15	7.5	150	380	2900	125
80-35-5-0.75	35	5	0.75	80	380	2900	36		150-145-9-7.5	145	9	7.5	150	380	1450	150
40-7-18-1.1	7	18	1.1	40	380	2900	30		200-150-9-7.5	150	9	7.5	200	380	2900	135
* 50-9-15-1.1	9	15	1.1	50	380	2900	32		50-20-60-11	20	60	11	50	380	2900	145
65-15-9-1.1	15	9	1.1	65	380	2900	35		65-30-50-11	30	50	11	65	380	2900	150
80-40-6-1.1	40	6	1.1	80	380	2900	37		80-40-40-11	40	40	11	80	380	2900	153
40-10-18-1.5	10	18	1.5	40	380	2900	33		100-80-25-11	80	25	11	100	380	2900	159
* 50-15-15-1.5	15	15	1.5	50	380	2900	35		100-100-25-11	100	25	11	100	380	1450	213
* 65-25-7-1.5	25	7	1.5	65	380	2900	37		150-150-12-11	150	12	11	150	380	2900	168
80-40-8-1.5	40	8	1.5	80	380	2900	39		150-130-15-11	130	15	11	150	380	1450	240
* 50-15-20-2.2	15	20	2.2	50	380	2900	40		200-200-9-11	200	9	22	200	380	2900	180
* 65-20-15-2.2	20	15	2.2	65	380	2900	47		200-300-7-11	300	7	22	200	380	1450	253
* 80-40-10-2.2	40	10	2.2	80	380	2900	46		50-30-60-15	30	60	15	50	380	2900	
100-50-7-2.2	50	7	2.2	100	380	2900	53		65-35-55-15	35	55	15	65	380	2900	
* 50-15-30-3	15	30	3	50	380	2900	47		80-45-52-15	45	52	15	80	380	2900	
* 65-37-13-3	37	13	3	65	380	2900	49		100-60-45-15	60	45	15	100	380	2900	
* 80-45-12-3	45	12	3	80	380	2900	50		100-100-30-15	100	30	15	100	380	1450	
100-60-9-3	60	9	3	100	380	2900	60		150-150-20-15	150	20	15	150	380	2900	
* 50-15-35-4	15	35	4	100	380	2900	76		150-180-15-15	180	15	15	150	380	1450	
* 65-20-25-4	20	25	4	65	380	2900	72		200-250-11-15	200	11	15	200	380	2900	
* 80-40-15-4	40	15	4	80	380	2900	75		200-200-12-15	200	12	15	200	380	1450	
* 100-60-12-4	60	12	4	100	380	2900	78		100-100-35-18.5	100	35	18.5	100	380	1450	
100-80-10-4	80	10	4	100	380	1450	116		150-180-20-18.5	180	20	18.5	150	380	1450	
150-100-8-4	100	8	4	150	380	2900	85		200-250-15-18.5	250	15	18.5	200	380	1450	
* 50-20-40-5.5	20	40	5.5	50	380	2900	97		250-400-7-18.5	250	7	18.5	250	380	1450	
* 65-25-35-5.5	25	35	5.5	65	380	2900	92		100-100-40-22	100	40	22	100	380	1450	
* 80-30-30-5.5	30	30	5.5	80	380	2900	93		150-200-22-22	200	22	22	150	380	1450	
* 100-65-18-5.5	65	18	5.5	100	380	2900	95		150-180-25-22	180	25	22	150	380	1450	
150-100-10-5.5	100	10	5.5	150	380	2900	105		200-400-10-22	400	10	22	200	380	1450	
* 50-20-50-7.5	20	50	7.5	50	380	2900	107		200-300-15-22	300	15	22	200	380	1450	
65-30-40-7.5	30	40	7.5	65	380	2900	105		250-450-7-22	450	7	22	250	380	1450	

注：型号前面带“*”表示可以定制304/316不锈钢材质。

S

全不锈钢排污泵

S SERIES STAINLESS STEEL SEWAGE PUMP



0.55kW
0.75kW
1.1kW



1.5kW
2.2kW



3kW
4kW



5.5kW
7.5kW

用途:

- 1、化工厂、金属制品厂污水排放
- 2、污水处理厂、医院 工厂的污水排放

使用条件:

- 1、介质温度不超过50℃，密度为1.0~1.3kg/m³，
PH指在3~11之间
- 2、电机部分露出液面不超过1/2。
- 3、泵必须在使用扬程范围内使用，保证电机不过载

特点:

整体304 316不锈钢精密铸造（包括叶轮）
氟橡胶O型圈和机械密封
耐腐蚀电缆线
100%铜线电机，足功率
304 316不锈钢紧固件
半开式叶轮，无堵塞设计

Application:

Chemical plants, sewage treatment plants,
facotires sewage discharges


Conditions of Use:

1. Medium temperature does not exceed 50 °C, density of
1.0-1.3kg / m³, PH between 3-11
2. No more of 1/2 part of motor should be exposed.
3. The pump must be used within the scope of head,
ensure that the motor is not overloaded

Feature:

Made of 304 or 316 cast stainless steel
O rings and mechanical seal are made of fluororubber
Shaft: stainless steel
Screw: stainless steel
Vortex impeller

外形尺寸表 Dimension Table

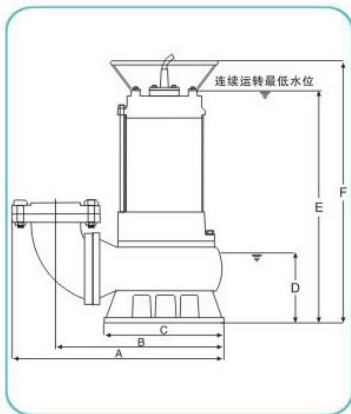

单位:mm

型 号	A	B	C	D	E	F
50S13-7-C.55D	240	200	165	120	380	450
50S13-7-C.55	240	200	165	120	380	450
50S10-10-0.75D	240	200	165	120	390	460
50S10-10-0.75	240	200	165	120	400	460
50S15-8-1.1D	240	200	165	120	400	470
50S15-8-1.1	240	200	165	120	480	470
50S20-12-1.5D	240	200	165	150	480	550
50S20-12-1.5	420	200	165	150	480	550
65S25-10-1.5D	420	200	165	150	480	550
65S25-10-1.5	420	200	165	150	480	550
80S30-8-1.5D	420	350	220	150	480	550
80S30-8-1.5	420	350	220	150	480	550
50S10-18-2.2	420	350	220	150	500	570
65S20-15-2.2	420	350	220	150	500	570
80S38-11-2.2	420	350	220	150	500	570
65S30-15-3	430	380	245	150	490	550
80S40-13-3	430	380	245	150	490	550
80S40-16-4	430	380	245	150	510	570
100S60-12-4	520	420	245	150	510	570
80S35-25-5.5	430	380	245	150	540	600
100S60-20-5.5	520	420	245	150	540	600
80S50-28-7.5	420	380	245	150	560	620
100S60-25-7.5	520	420	245	150	560	620

性能参数表 Table of parameter

Model 型号	Voltage 电压 (V)	Power 功率 (kW)	DIA 口径 (mm)	Capacity 标准流量 (m³/h)	Head 标准扬程 (m)	Max.Capacity 最大流量 (m³/h)	Max.Head 最大扬程 (m)	Weight 重量 (kg)
40S8-9-0.55D	220	0.55	40	8	9	16	10	20
40S8-9-0.55	380	0.55	40	8	9	16	10	20
50S13-7-0.55D	220	0.55	50	13	7	21	10	20
50S13-7-0.55	380	0.55	50	13	7	21	10	20
40S8-11-0.75D	220	0.75	40	8	11	19	10	21
40S8-11-0.75	380	0.75	40	8	11	19	10	21
50S10-10-0.75D	220	0.75	50	10	10	22	12	21
50S10-10-0.75	380	0.75	50	10	10	22	12	21
40S8-12-1.1D	220	1.1	40	8	12	19	12	22
40S8-12-1.1	380	1.1	40	8	12	19	12	22
50S15-8-1.1D	220	1.1	50	15	8	23	11	22
50S15-8-1.1	380	1.1	50	15	8	23	11	22
40S15-15-1.5D	220	1.5	40	15	15	20	18	37
40S15-15-1.5	380	1.5	40	15	15	20	18	37
50S20-12-1.5D	220	1.5	50	20	12	31	18	37
50S20-12-1.5	380	1.5	50	20	12	31	18	37
65S25-10-1.5D	220	1.5	65	25	10	36	16	37
65S25-10-1.5	380	1.5	65	25	10	36	16	37
80S30-8-1.5D	220	1.5	80	30	8	40	14	37
80S30-8-1.5	380	1.5	80	30	8	40	14	37
100S40-5-1.5	380	1.5	100	40	5	50	10	38
50S10-18-2.2	380	2.2	50	10	18	32	22	38
65S20-15-2.2	380	2.2	65	20	15	40	22	38
80S38-11-2.2	380	2.2	80	38	11	60	21	38
100S45-6-2.2	380	2.2	100	45	6	52	21	38
65S30-15-3	380	3	65	30	15	38	18	55
80S40-13-3	380	3	80	40	13	57	18	57
100S50-10-3	380	3	100	50	10	65	15	58
65S30-18-4	380	4	65	30	18	45	24	58
80S40-16-4	380	4	80	40	16	68	24	58
100S60-12-4	380	4	100	60	12	82	23	59
65S20-28-5.5	380	5.5	65	20	28	40	32	64
80S35-25-5.5	380	5.5	80	35	25	80	30	64
100S60-20-5.5	380	5.5	100	60	20	93	27	66
65S40-30-7.5	380	7.5	65	40	30	60	32	68
80S50-28-7.5	380	7.5	80	50	28	75	30	68
100S60-25-7.5	380	7.5	100	60	25	91	32	70

EP

无堵塞排污泵

EP SERIES NON-CLOG SEWAGE PUMP



用途:

- 1、城市污水处理厂排放系统。
- 2、地铁、地下室、人防系统排水站。
- 3、企业单位、工厂、医院、住宅区的污水排水站。
- 4、化粪池、农场的污水排放

使用条件:

- 1、介质温度不超过50℃，密度为1.0-1.3kg/m³。
- 2、电机部分露出液面不超过1/2。
- 3、泵必须在使用扬程范围内使用，保证电机不过载。

特点:

100%铜线电机，足功率
合金对碳化硅机械密封
不锈钢主轴
不锈钢紧固件
不锈钢机筒
外观光滑美观
半开式叶轮，无堵塞设计

Application:

1. Sewage treatment plant.
2. Subway, basement, air defense systems pumping station.
3. Factories, hospitals, residential sewage discharges.
4. Sewage discharge of septic tank and farm


Conditions of Use:

1. Medium temperature does not exceed 50 °C, density of 1.0-1.3kg / m³.
2. No more of 1/2 part of motor should be exposed.
3. The pump must be used within the scope of head, ensure that the motor is not overloaded

Feature:

Motor: 100% copper wire, full power
mechanical seal: Alloy and silicon carbide
Shaft: stainless steel
Screw: stainless steel
Motor case: stainless steel
Outlook: smooth and nice
Vortex impeller and made of stainless steel

单位:mm

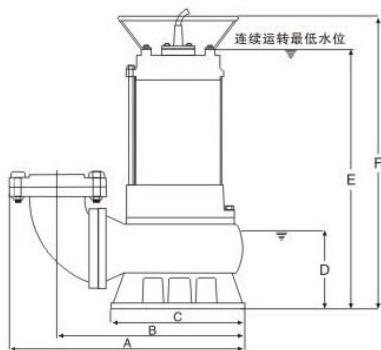

性能参数表

型 号	A	B	C	D	E	F
50EP12-6-0.4D	240	200	165	120	380	450
50EP12-6-0.4	240	200	165	120	380	450
50EP13-7-0.55D	240	200	165	120	380	450
50EP13-7-0.55	240	200	165	120	380	450
50EP10-10-0.75D	240	200	165	120	390	460
50EP-10-10-0.75	240	200	165	120	400	460
50EP-15-8-1.1D	240	200	165	120	400	470
50EP15-8-1.1	240	200	165	120	480	470
50EP20-12-1.5D	240	200	165	150	480	550
50EP20-12-1.5	420	200	165	150	480	550
65EP25-10-1.5D	420	200	165	150	480	550
65EP25-10-1.5	420	200	165	150	480	550
80EP30-8-1.5D	420	350	220	150	480	550
80EP30-8-1.5	420	350	220	150	480	550
50EP10-18-2.2	420	350	220	150	500	570
65EP20-15-2.2	420	350	220	150	500	570
80EP38-11-2.2	420	350	220	150	500	570
65EP30-15-3	430	380	245	150	490	550
80EP40-13-3	430	380	245	150	490	550
80EP40-16-4	430	380	245	150	510	570
100EP60-12-4	520	420	245	150	510	570
80EP35-25-5.5	430	380	245	150	540	600
100EP60-20-5.5	520	420	245	150	540	600
80EP50-28-7.5	420	380	245	150	560	620
100EP60-25-7.5	520	420	245	150	560	620
100EP80-25-11	540	440	245	180	610	690

Model 型号	Voltage 电压 (V)	Power 功率 (kW)	DIA 口径 (mm)	Capacity 标准流量 (m³/h)	Head 标准扬程 (m)	Max.Capacity 最大流量 (m³/h)	Max.Head 最大扬程 (m)	Weight 重量 (kg)
40EP8-9-0.55D	220	0.55	40	8	9	16	10	20
40EP8-9-0.55	380	0.55	40	8	9	16	10	20
50EP13-7-0.55D	220	0.55	50	13	7	21	10	20
50EP13-7-0.55	380	0.55	50	13	7	21	10	20
40EP8-11-0.75D	220	0.75	40	8	11	19	10	21
40EP8-11-0.75	380	0.75	40	8	11	19	10	21
50EP10-10-0.75D	220	0.75	50	10	10	22	12	21
50EP10-10-0.75	380	0.75	50	10	10	22	12	21
40EP8-12-1.1D	220	1.1	40	8	12	19	12	22
40EP8-12-1.1	380	1.1	40	8	12	19	12	22
50EP15-8-1.1D	220	1.1	50	15	8	23	11	22
50EP15-8-1.1	380	1.1	50	15	8	23	11	22
40EP15-15-1.5D	220	1.5	40	15	15	20	18	37
40EP15-15-1.5	380	1.5	40	15	15	20	18	37
50EP20-12-1.5D	220	1.5	50	20	12	31	18	37
50EP20-12-1.5	380	1.5	50	20	12	31	18	37
65EP25-10-1.5D	220	1.5	65	25	10	36	16	37
65EP25-10-1.5	380	1.5	65	25	10	36	16	37
80EP30-8-1.5D	220	1.5	80	30	8	40	14	37
80EP30-8-1.5	380	1.5	80	30	8	40	14	37
100EP40-5-1.5	380	1.5	100	40	5	50	10	38
50EP10-18-2.2	380	2.2	50	10	18	32	22	38
65EP20-15-2.2	380	2.2	65	20	15	40	22	38
80EP38-11-2.2	380	2.2	80	38	11	60	21	38
100EP45-6-2.2	380	2.2	100	45	6	52	21	38
65EP30-15-3	380	3	65	30	15	38	18	55
80EP40-13-3	380	3	80	40	13	57	18	57
100EP50-10-3	380	3	100	50	10	65	15	58
65EP30-18-4	380	4	65	30	18	45	24	58
80EP40-16-4	380	4	80	40	16	68	24	58
100EP60-12-4	380	4	100	60	12	82	23	59
65EP20-28-5.5	380	5.5	65	20	28	40	32	64
80EP35-25-5.5	380	5.5	80	35	25	80	30	64
100EP60-20-5.5	380	5.5	100	60	20	93	27	66
65EP40-30-7.5	380	7.5	65	40	30	60	32	68
80EP50-28-7.5	380	7.5	80	50	28	75	30	68
100EP60-25-7.5	380	7.5	100	60	25	91	32	70

WQK/QG

带铰刀排污泵 (铸铁)

WQK/QG SEWAGE PUMP WITH REAMER



A款 220V
A Type



A款 380V
A Type

用途:

企业单位、工厂、医院、住宅区的污水排水站。
化粪池、沼气池的污水排放

使用条件:

- 1、介质温度不超过50℃，密度为1.0~1.3kg/m³。
- 2、电机部分露出液面不超过1/2。
- 3、泵必须在使用扬程范围内使用，保证电机不过载。

特点:

不锈钢组合刀片和刀盘 (绞碎毛巾、塑料袋等杂物)
100%铜线电机，足功率
合金对碳化硅机械密封
不锈钢紧固件

Application:

factories, hospitals, residential sewage discharges.
Sewage discharge of septic tank, marsh gas tank and farm

Conditions of Use:

1. Medium temperature does not exceed 50 °C, density of 1.0-1.3kg / m³.
2. No more of 1/2 part of motor should be exposed.
3. The pump must be used within the scope of head, ensure that the motor is not overloaded

Feature:

Reamer made of stainless steel (cut towel, plastic bags and other debris)
Motor: 100% copper wire, full power
mechanical seal Alloy and silicon carbide
Screw: stainless steel



实测物体



经过本公司的实际测验，以上物体被绞碎效果显著。

B款 B Type

注：0.75~2.2kW采用“一”字刀片，3kW以上采用“十”字刀片。

A款 性能参数表 A Type

Model 型号	Capacity 流量	Head 扬程	Power 功率	DIA 口径	Voltage 电压	Speed 转速
WQK	(m ³ /h)	(m)	(kW)	(mm)	(V)	(r/min)
WQK10-7-0.75/QG	10	7	0.75	50	220	2900
WQDK10-10-1.1/QG	10	10	1.1	50	220	2900
WQK10-10-1.1/QG	10	10	1.1	50	380	2900
WQK15-10-1.5/QG	15	10	1.5	50	220	2900
WQK26-7-1.5/QG	26	7	1.5	65	380	2900
WQK30-7-2.2/QG	30	7	2.2	65	380	2900
WQ30-10-3/QG	30	10	3	80	380	2900
WQK40-10-4/QG	40	10	4	80	380	2900
WQK55-10-5.5/QG	55	10	5.5	80	380	2900

B款 性能参数表 B Type

Model 型号	Capacity 流量	Head 扬程	Power 功率	DIA 口径	Voltage 电压	Speed 转速
WQK	(m ³ /h)	(m)	(kW)	(mm)	(V)	(r/min)
WQK10-10-0.75QG	10	10	0.75	50	380	2900
WQK10-10-1.1QG	10	10	1.1	50	380	2900
WQK15-10-1.1QGD	15	10	1.1	50	220	2900
WQK26-7-1.5QG	26	7	1.5	65	380	2900
WQK25-7-1.5QGD	25	7	1.5	65	220	2900
WQK30-7-2.2QG	30	7	2.2	65	380	2900
WQK30-10-3QG	30	10	3	80	380	2900
WQK40-10-4QG	40	10	4	80	380	2900
WQK65-12-5.5QG	65	12	5.5	100	380	2900
WQK40-20-7.5QG	40	20	5.5	80	380	2900

XWQ切割排污泵

XWQ CUTTING SEWAGE PUMP

功能介绍 Using conditions

XWQ切割排污泵切割部分具有独特的螺旋式结构及带锋利刀口设计。在保证水利性能的高效且超过同产品的前提下，又具有一定的切割能力，保证稻草、婴儿尿不湿、棉、布等废弃物切碎后排出的优越切割性能。

With the design of spiral structure and sharp cutter, XWQ series cutting sewage water pump has strong cutting power under the premise of high performance and superiority. It can show superior cutting performance to tear off and discharge the waste like straw, diaper, cotton cloth etc.

用途 Application

- 1、企业单位、工厂、医院、住宅区的污水排水站。
- 2、化粪池、沼气池的污水排放。
1. Factories, hospitals, residential sewage discharges.
2. Sewage discharge of septic tank, marsh gas tank and farm.

使用条件 Using conditions

- 1、介质温度不超过50℃，密度为1.0~1.3kg/m³。
- 2、电机部分露出液面不超过1/2。
- 3、泵必须在使用扬程范围内使用，保证电机不过载。
1. Medium temperature does not exceed 50℃, density of 1.0~1.3kg/m³.
2. No more of 1/2 part of motor should be exposed.
3. The pump must be used within the scope of head, ensure that the motor is not overloaded.

特点 Feature

- 1、切割部分为洛氏硬度48HR以上合金材质，特殊材质需提前定制。
- 2、全扬程、低能耗（根据实际测试报告功率曲线变化得出的结果）
- 3、便拆式刀盘设计。根据不同使用环境更换不同形式刀盘（主要为市政型及畜牧养殖场特殊型两种刀盘）
- 4、国产品牌轴承或选用进口品牌轴承
1. The cutter part is made of alloy material, Rockwell hardness more than 48HR. Special material need to customize in advance.
2. Full lift, low energy consumption (result from actual test)
3. Easy-disassembled cutter can replace different types according to using condition (two main types for municipal engineering and livestock)
4. Optional bearing: domestic brand or imported brand.



成功案例 Successful cases

- 出口到非洲和东南亚等国家与地区
- 中间商返购率高达78%
- Export to Africa, Southeast Asia and other countries and regions
- The reorder rate of reseller up to 78%

汉森 Hanthing pump

切割效果 Effect of cutting



性能参数表 Model Table

Model 型号	Capacity 流量 (m ³ /h)	Head 扬程 (m)	Power 功率 (kW)	DIA 口径 (mm)	Voltage 电压 (V)	Speed 转速 (r/min)	Weight 重量 (kg)	Volume 体积
50XWQ10-10-0.75	10	10	0.75	50	220/380	2900	23.5	48×20×22
50XWQ12-10-1.1	12	10	1.1	50	220/380	2900	23.8	48×20×22
50XWQ15-15-1.5	15	15	1.5	50	220/380	2900	37.3	60×27×25
65XWQ25-15-2.2	25	15	2.2	65	380	2900	41.5	61×29×29
80XWQ45-9-2.2	45	9	2.2	80	380	2900	41.5	61×29×29
50XWQ15-22-3	15	22	3	50	380	2900	46.1	63×26×30
65XWQ35-15-3	35	15	3	80	380	2900	46.1	63×26×30
80XWQ43-13-3	43	13	3	80	380	2900	46.1	63×26×30
65XWQ26-22-4	26	22	4	65	380	2900	52.2	64×29×32
80XQ45-17-4	45	17	4	80	380	2900	52.2	64×29×32
80XWQ45-20-5.5	45	20	5.5	80	380	2900	62.3	73×29×34
100XWQ65-15-5.5	65	15	5.5	100	380	2900	62.3	73×29×34
80XWQ45-25-7.5	45	25	7.5	80	380	2900	72	73×31×35
100XWQ100-15-7.5	100	15	7.5	100	380	2900	72	73×31×35
150XWQ150-15-11	150	15	11	150	380	2900		
150XWQ200-15-15	200	15	15	150	380	2900		
150XWQ250-15-18.5	250	15	18.5	150	380	2900		
150XWQ300-15-22	300	15	22	150	380	2900		

WQAS切割排污泵

WQAS CUTTING SEWAGE PUMP

功能介绍 Using conditions

WQAS切割排污泵切割部分使用A级高铬合金材料，真正的双铰刀切割，切割面多一倍，能够实现5倍多的切割工作量。在保证水利性能的高效且超过同产品的前提下，又具有一定的切割能力，保证稻草、婴儿尿不湿、棉、布等废弃物切碎后排出的优越切割性能。

WQAS series sewage cutter pumps are equipped with A grade high chromium alloy cutting impeller, both sides have cutting function, about 5 times higher cutting efficiency than common cutter pumps. Have same function of flow and head as other pumps, is especially designed for tear straw, toilet paper, rubber sundries, cotton, fabric, etc. wastes.

用途 Application

- 1、企业单位、工厂、医院、住宅区的污水排水站。
- 2、化粪池、沼气池的污水排放。

- 1.Factories,hospitals,residential sewage discharges.
- 2.Sewage discharge of septic tank,marsh gas tank and farm.



使用条件 Using conditions

- 1、介质温度不超过50℃，密度为1.0~1.3kg/m³。
- 2、电机部分露出液面不超过1/2。
- 3、泵必须在使用扬程范围内使用，保证电机不过载。

- 1.Medium temperature does not exceed 50℃, density of 1.0~1.3kg/m³.
- 2.No more of 1/2 part of motor should be exposed.
- 3.The pump must be used within the scope of head,ensure that the motor is not overloaded.

成功案例 Successful cases

- 出口到非洲和东南亚等国家与地区
- 中间商返购率高达78%
- Export to Africa,Southeast Asia and other countries and regions
- The reorder rate of reseller up to 78%

特点 Feature

- 1、切割部分为A级高铬合金料，双铰刀切割，切割面多一倍，能实现5倍多的切割工作量。
- 2、全扬程、低能耗（根据实际测试报告功率曲线变化得出的结果）
- 3、美观半圆不锈钢提手，弧形美观外形设计，不锈钢的固定电缆线螺丝，外观光滑显档次。
- 4、国产品牌轴承或选用进口品牌轴承

- 1.Cutter is made by A grade High Chromium Alloy material, double cutting sides, 5 times high working efficiency.
- 2.Low energy cost for same performance (results got from our real pump test)
- 3.Stainless steel arc shape handle, all use stainless steel screws, looks more beautiful and easy to use.
- 4.Use domestic brand bearing or imported NSK bearing if need

汉森 Hanthing pump

切割效果 Effect of cutting



手套
gloves



毛巾
towel



婴儿尿不湿
Baby diapers



塑料袋
Plastic bags



编织袋
Woven bag



地毯
carpet



石子、螺丝、
剪刀等坚硬材质
Hard materials like
stones, screw etc



性能参数表 Model Table

Model 型号	Capacity 流量 (m ³ /h)	Head 扬程 (m)	Power 功率 (kW)	DIA 口径 (mm)	Voltage 电压 (V)	Speed 转速 (r/min)
XWQ						
50WQAS10-10-0.75	10	10	0.75	50	220/380	2900
50WQAS15-9-1.1	15	9	1.1	50	220/380	2900
50WQAS10-15-1.5	10	15	1.5	50	220/380	2900
65WQAS25-8-1.5	25	8	1.5	65	220/380	2900
50WQAS9-22-2.2	9	22	2.2	50	380	2900
65WQAS25-15-2.2	25	15	2.2	65	380	2900
80WQAS35-10-2.2	35	10	2.2	80	380	2900
50WQAS15-22-3	15	22	3	50	380	2900
65WQAS25-18-3	25	18	3	65	380	2900
80WQAS37-13-3	37	13	3	80	380	2900
65WQAS25-21-4	25	21	4	65	380	2900
80WQAS40-18-4	40	18	4	80	380	2900
100WQAS60-14-4	60	14	4	100	380	2900
65WQAS30-25-5.5	30	25	5.5	65	380	2900
80WQAS45-20-5.5	45	20	5.5	80	380	2900
100WQAS65-18-5.5	65	18	5.5	100	380	2900
65WQAS30-30-7.5	30	30	7.5	65	380	2900
80WQAS45-25-7.5	45	25	7.5	80	380	2900
100WQAS85-17-7.5	85	17	7.5	100	380	2900